





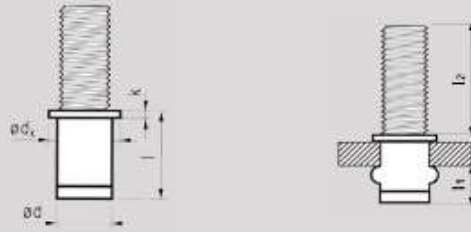

Steel
Zinc plated



MASTERBOLT I cylindrical head

Ø d	l [+1,0/-0,5]		Item nr.	Ø dk	k	Ø d	l ₁	l ₂
[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[mm]	[mm]
M4	8,0	0,5-2,0	29M042010	8,0	0,5	5,4	3,5	10
	8,0	0,5-2,0	2015	8,0	0,5	5,4	3,5	15
Ø 5,5	8,0	2,0-3,0	3010	8,0	0,5	5,4	4,0	10
	8,0	2,0-3,0	3015	8,0	0,5	5,4	4,0	15
M5	9,0	0,5-2,0	29M052010	9,0	0,8	6,5	4,5	10
	9,0	0,5-2,0	2015	9,0	0,8	6,5	4,5	15
Ø 6,6	10,5	2,0-3,5	3510	9,0	0,8	6,5	4,5	10
	10,5	2,0-3,5	3515	9,0	0,8	6,5	4,5	15
M6	10,0	0,5-2,5	29M062510	10,0	1,0	7,7	5,0	10
	10,0	0,5-2,5	2515	10,0	1,0	7,7	5,0	15
Ø 7,8	11,5	2,5-4,0	4010	10,0	1,0	7,7	5,0	10
	11,5	2,5-4,0	4015	10,0	1,0	7,7	5,0	15
M8	12,5	1,0-3,0	29M083015	12,0	1,5	9,8	7,0	15
	12,5	1,0-3,0	3020	12,0	1,5	9,8	7,0	20
Ø 9,9	15,0	3,0-5,0	5015	12,0	1,5	9,8	7,0	15
	15,0	3,0-5,0	5020	12,0	1,5	9,8	7,0	20

Rivet bolts are comparable to DIN bolts - Class 8.8